



AZ-



AZU-

Capacitors screw terminal type –High Reliability

- AZX Flat Bottom
- AZUX Mounting Stud
- Capacitance Tolerance: -20 + 20% - standard (M)
- Capacitance Tolerance: -10 + 30% - on request (X)
- Climatic category: 40/105/86
- Case: 51x105 – 90x222
- Temperature – 40°C + 105°C
- All welded construction reliable electrical contact

Mechanical Outlines

- Case: aluminium made
- Terminals: screw
- Sealing: hermetic by EPR gasket, on a resin cover
- Pressure Release Vent: silicone-rubber
- Sleeve: self-extinguishing thermo shrinkable
- Size: see enclosed drawings
- Mounting Hardware: see hardware section
- External Material UL94-V0

Ordering Code: Example

AZ(U)X 472 M 400 DF 1

Itelcond Capacitor Series
 U: Mounting stud
 M: terminal

Capacitance: [μF] significant digit plus multiplying factor:
 1=x10, 2=x100, 3=x1.000, 4=x10.

1= Sleeve – 0 = not Sleeve
 Case Size: diameter – Length [mm]
 Voltage – DC rated [V]
 Tolerance range:
 M={±20%} X={-10+30%}

Ripple Current

The allowable values of ripple current in Ampères, are related to the temperature and frequency by following equation:

$$I_{\text{Ripple}} = K_t \cdot K_f \cdot I_{\text{Ripple@105}^\circ\text{C}}$$

Where:

- $I_{\text{Ripple@105}^\circ\text{C}}$ is the limit given by tables, @ 105°C/100HZ
- K_t is the Temperature Correlation Factor
- K_f is the Frequency Correlation Factor

Note .Superimposed alternating voltage summed to DC volage must not exceed rated voltage, rated ripple current must not be exceeded and no reverse polarity is allowed

°C	40	55	65	75	85	95	105
Kt	2.50	2.40	2.20	2.00	1.80	1.30	1.00

Table 1-Kt Values

Hz	Kf
50	0.78
100	1.00
120	1.02
200	1.06
300	1.08
400	1.09
500	1.32
>1000	1.37

Table 2-Kf Values

Expected Lifetime End of Life Criteria

During useful life typical electrical parameters of electrolytic capacitor are subject to change.

End of Life criteria, when rated temperature, voltage and ripple are applied, are:

$$\frac{\Delta C}{C_{t0}} \leq 30\% \quad \text{Equation 1}$$

$$ESR \leq 3 \cdot ESR_{t0} \quad \text{Equation 2}$$

$$I_r \leq I_{r_{t0}} \quad \text{Equation 3}$$

where t_0 is the initial value

Voltage Endurance Test Requirements

On Voltage Endurance Test are based Expected Lifetime Curves.

End of Life criteria, when rated temperature, and voltage are applied for 2'000hrs, are

$$\frac{\Delta C}{C_{t0}} \leq 20\% \quad \text{Equation 4}$$

$$ESR \leq 1,3 \cdot ESR_{t0} \quad \text{Equation 5}$$

$$I_r \leq I_{r_{t0}} \quad \text{Equation 6}$$

where t_0 is the initial value

Expected Lifetime Vs Temperature and Ripple Current

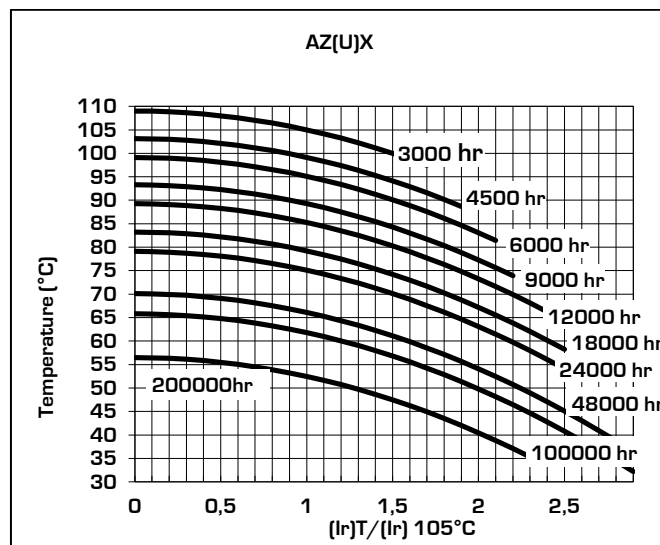


Table 3

Leakage Current

After the rated voltage has been applied to the capacitor for 5 minutes the leakage current must be within those limits.

Maximum limit	@25°C	$I_f \leq 1.5 \cdot \sqrt{C \cdot V}$
Operating limit	@25°C	$I_f \leq 1.5 \cdot \sqrt{C \cdot V}$


Where: I_f =leakage current [μ A], C =capacitance [μ F], V =rated voltage [V]

Surge Voltage

Working Voltage	200	250	350	400	450
Surge Voltage	230	290	385	440	495

	Capacitance	Case	Diam	Height	Tanδ	ESRmax typ		Zmax	Iripple @100Hz		Ordering Code
	[μF]@100Hz		[mm]	[mm]	[%]@100Hz	[mΩ]@100Hz	[mΩ]@10KHz	[mΩ]@10KHz	[A]@55°C	[A]@105°C	(U) for mounting stud
200	2200	BC	51	105	0,09	65	49	61	10,0	5,4	AZ(U)X222M200BC1
	3300	CC	63	105	0,09	43	33	40	13,0	7,5	AZ(U)X332M200CC1
	4700	DC	76	105	0,09	30	23	28	18,0	10,0	AZ(U)X472M200DC1
	6800	DF	76	145	0,09	21	16	18	25,0	13,7	AZ(U)X682M200DF1
	10000	DF	76	145	0,09	14	11	13	30,0	16,6	AZ(U)X103M200DF1
250	2200	BC	51	105	0,09	65	52	49	10,8	6,0	AZ(U)X222M250BC1
	3300	BC	51	105	0,09	43	35	33	13,2	7,3	AZ(U)X332M250BC1
		CC	63	105	0,09	43	35	33	15,0	8,3	AZ(U)X332M250CC1
	4700	DC	76	105	0,09	30	24	23	19,9	11,0	AZ(U)X472M250DC1
		DF	76	145	0,09	30	24	23	22,8	12,7	AZ(U)X472M250DF1
	6800	DF	76	145	0,09	21	17	16	27,4	15,2	AZ(U)X682M250DF1
	10000	DF	76	145	0,09	14	11	11	33,3	18,5	AZ(U)X103M250DF1
		DJ	76	220	0,09	14	11	11	40,1	22,3	AZ(U)X103M250DJ1
	15000	DJ	76	220	0,09	10	8	7	49,1	27,3	AZ(U)X153M250DJ1
EF		90	145	0,09	10	8	7	44,8	24,9	AZ(U)X153M250EF1	
22000	EJ	90	220	0,09	7	5	5	65,2	36,2	AZ(U)X223M250EJ1	
350	1500	BC	51	105	0,07	74	59	56	10,1	5,6	AZ(U)X152M350BC1
	2200	CC	63	105	0,07	51	41	38	13,9	7,7	AZ(U)X222M350CC1
	3300	CC	63	105	0,07	34	27	25	17,0	9,4	AZ(U)X332M350CC1
		DC	76	105	0,07	34	27	25	18,9	10,5	AZ(U)X332M350DC1
	3900	DC	76	105	0,07	29	23	21	20,5	11,4	AZ(U)X392M350DC1
	4700	DC	76	105	0,07	24	19	18	22,5	12,5	AZ(U)X472M350DC1
		DF	76	145	0,07	24	19	18	25,9	14,4	AZ(U)X472M350DF1
	5600	DF	76	145	0,07	20	16	15	28,2	15,7	AZ(U)X562M350DF1
	6800	DF	76	145	0,07	16	13	12	31,1	17,3	AZ(U)X682M350DF1
		DJ	76	220	0,07	16	13	12	37,5	20,8	AZ(U)X682M350DJ1
	8200	DF	76	145	0,07	0	0	0	0,0	0,0	AZ(U)X822X350DF1
10000	DJ	76	220	0,07	11	9	8	45,4	25,2	AZ(U)X103X350DJ1	
	EF	90	145	0,07	11	9	8	41,5	23,0	AZ(U)X103X350EF1	
15000	EJ	90	220	0,07	7	6	6	61,0	33,9	AZ(U)X153X350EJ1	
400	680	BC	51	105	0,07	164	131	123	6,8	3,8	AZ(U)X682X400BC1
	1000	BC	51	105	0,07	111	89	84	8,2	4,6	AZ(U)X102X400BC1
	1500	BC	51	105	0,07	74	59	56	10,1	5,6	AZ(U)X152X400BC1
	2200	CC	63	105	0,07	51	41	38	13,9	7,7	AZ(U)X222X400CC1
		DC	76	105	0,07	51	41	38	15,4	8,6	AZ(U)X222X400DC1
	3300	DC	76	105	0,07	34	27	25	18,9	10,5	AZ(U)X332X400DC1
		DF	76	145	0,07	34	27	25	21,7	12,0	AZ(U)X332X400DF1
	3900	DF	76	145	0,07	29	23	21	23,6	13,1	AZ(U)X392X400DF1
	4700	DF	76	145	0,07	24	19	18	25,9	14,4	AZ(U)X472X400DF1
	5600	DF	76	145	0,07	20	16	15	28,2	15,7	AZ(U)X562X400DF1
	6800	DF	76	145	0,07	16	13	12	31,1	17,3	AZ(U)X682X400DF1
DJ		76	220	0,07	16	13	12	37,5	20,8	AZ(U)X682X400DJ1	

	Capacitance	Case	Diam	Height	Tan δ	ESRmax typ		Zmax	Iripple @100Hz		Ordering Code
	[μ F]@100Hz		[mm]	[mm]	[%]@100Hz	[m Ω]@100Hz	[m Ω]@10KHz	[A]@55°C	[A]@105°C	(U) for mounting stud	
400	10000	EF	90	145	0,07	11	9	8	41,5	23,0	AZ{U}X103X400EF1
		DJ	76	220	0,07	11	9	8	45,4	25,2	AZ{U}X103X400DJ1
	15000	EJ	90	220	0,07	7	6	6	61,0	33,9	AZ{U}X153X400EJ1
450	1000	BC	51	105	0,08	127	102	96	7,7	4,3	AZ{U}X102X450BC1
	1500	CC	63	105	0,08	85	68	64	10,7	5,9	AZ{U}X152X450CC1
	2200	DC	76	105	0,08	58	46	43	14,4	8,0	AZ{U}X222X450DC1
		DF	76	145	0,08	58	46	43	16,5	9,2	AZ{U}X222X450DF1
	3300	DF	76	145	0,08	39	31	29	20,3	11,3	AZ{U}X332X450DF1
	3900	DF	76	145	0,08	33	26	24	22,0	12,2	AZ{U}X392X450DF1
	4700	DF	76	145	0,08	27	22	20	24,2	13,4	AZ{U}X472X450DF1
	5600	DF	76	145	0,08	23	18	17	26,4	14,7	AZ{U}X562X450DF1
	6800	DJ	76	220	0,08	19	15	14	35,1	19,5	AZ{U}X682X450DJ1
		EF	90	145	0,08	19	15	14	32,0	17,8	AZ{U}X682X450EF1
	10000	DJ	76	220	0,08	13	10	10	42,5	23,6	AZ{U}X103X450DJ1
10000	EJ	90	220	0,08	13	10	10	46,6	25,9	AZ{U}X103X450EJ1	

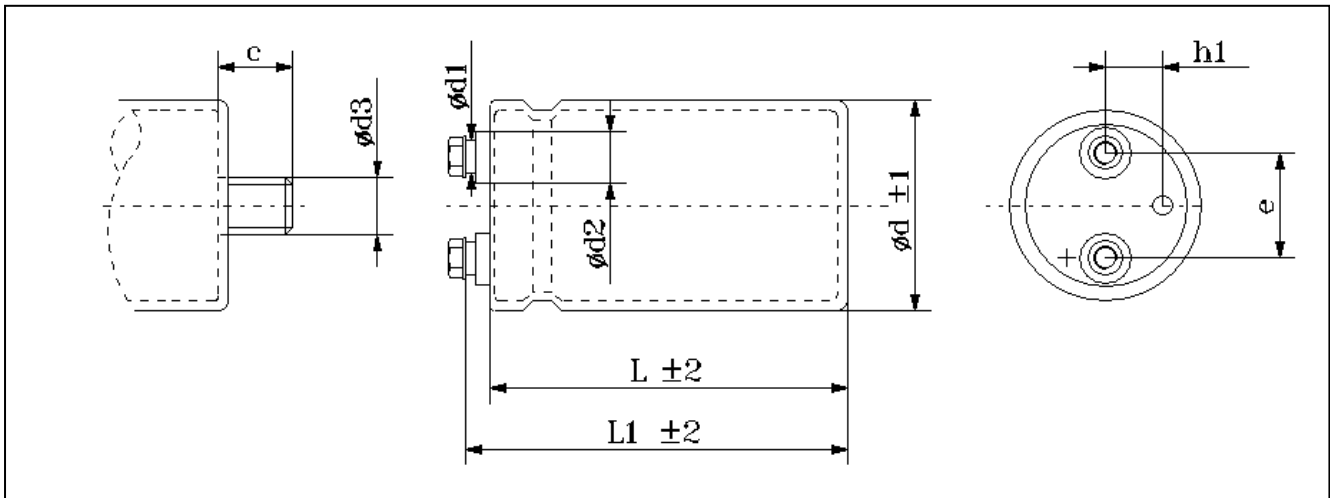Dimension, Quantity and Weight for box

61

Case				Connections							Mounting Stud			Packaging	
Code	DxL	L1	h1	d1	d2	e	Terminal	Screw			Screw			Pcs/Box	Weight/box
							Code	Thread	Torque	Lenght	d3	c	Torque		
BC	51x105	109	13	8	13	22.2	X	M5	2,0	10	M12	16	10Nm	30	6-9
CC	63x105	111	16	8	13	28.6	X	M5	2,0	10	M12	16	10Nm	20	6-8
DC	76x105	111	19	8	13	31.8	X	M5	2,0	10	M12	16	10Nm	12	5-7
DF	76x145	151	19	8	13	31.8	X	M5	2,0	10	M12	16	10Nm	12	6-14
				18	23		G	M6	2,5						
DK	76x165	173	19	8	13	31.8	X	M5	2,0	10	M12	16	10Nm	12	6-14
				18	23		G	M6	2,5						
DJ	76x220	222	19	8	13	31.8	X	M5	2,0	10	M12	16	10Nm	8	9-11
				18	23		G	M6	2,5						
EC	90x105	112	19	18	23	31,8	G	M6	2,5	10	M12	16	10Nm	6	7-9
EF	90x145	153	19	18	23	31,8	G	M6	2,5	10	M12	16	10Nm	6	9-11
EJ	90x220	227	19	18	23	31,8	G	M6	2,5	10	M12	16	10Nm	6	8-12

All dimensions in mm, torque in Nm, weight in kg

