

Overview

The Pro Flicker LED controller, new for 2023, is our most advanced pattern effects generator for LEDs and now includes artificial intelligence (AI) based prediction algorithms for the most realistic candle and flame effects.


A single pushbutton allows the user to cycle through a wide array of steady-state, flame, electrical flicker and surge, and strobe and pulsation patterns with varying intensities, modulation, and flickering. Internal memory allows the device to resume the previously selected output mode in the event power is lost to the device. This is also useful for permanent installations where a single operating mode is required continuously even when power is cycled.

The Pro Flicker LED controller can be used with LEDs, low voltage incandescent, and halogen bulbs.

Features

- Artificial Intelligence (AI) Forward Prediction
- True non-repeating random algorithms
- Twenty (20) modes of operation
- For use with LEDs (dimnable types)
- Incandescent and halogen lights
- Single button operation
- Onboard LED mirrors the output mode
- Memory saves mode during power loss
- Operating Voltage: 7VDC to 24VDC
- Max. Load Current: 3A (TBC)
- Reverse Voltage Protection
- Flange mount for easy installation
- Removable terminal blocks

Connection Diagram

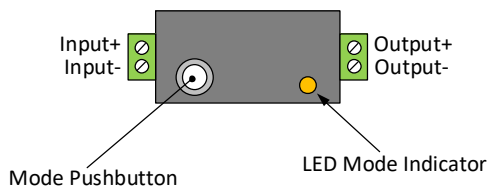

Operation

Using the Pro Flicker LED controller is extremely simple. Simply connect the light source to the output terminals as shown in the previous diagram and use the pushbutton to cycle through the various modes. Each press of the pushbutton will advance the operational mode by one. After all modes have been cycled through, the unit will enter OFF mode. In this mode, the output to the LED driver is disabled.

If the event you do not have an external light connected, there is an onboard LED which will illuminate and reflect the specific mode that is chosen.

Onboard LED Status

There is an onboard amber LED that mirrors the output modulation. This is useful for setting the mode without having an output connected, or if the output light is located in an area that is separate from where the controller is located.

OFF Mode Considerations for Battery Powered Controllers

When the unit is in OFF mode, the output driver is disabled, however, the microprocessor inside is still in a quiescent state which is consuming a minute amount of power. If you are using a battery source, it is recommended to use an external switch to disconnect power from the controller when not in use.

Discrete LEDs and Current Limiting Resistors

The output driver of the Pro Flicker controller is not current regulated, therefore if you plan on using discrete LEDs, you will need to use the proper current limiting resistors with the LEDs. Current limiting resistors should be utilized to ensure the maximum continuous current is not exceeded per the LED's datasheet.

Please note, that LED bulbs and other commercially packaged LEDs that are labeled for 12V or 24V use, generally already have the proper current limiting resistors installed.

Output Current Capability

The output driver stage of the Pro Flicker LED controller uses a high power, ultra-efficient N-channel switching MOSFET utilizing advanced Pulse Width Modulation (PWM) technology.

The maximum output current of the Pro Flicker LED controller is 3A. (TBC)

Electrical Glitch Suite Modes

The following list are all the available modes included with the Pro Flicker LED controller for the Electrical Glitch Suite. We have added a single flame mode for your evaluation. If you enjoy the flame mode, please check out the Candle and Flame Suite Pro Flicker LED controller.

Definitions:

Electrical Flicker – Glitches are drops in brightness

Electrical Surge – Glitches are increases in brightness

Mode	Description	Brightness
OFF	Output OFF	
1	Steady Output	100%
2	Steady Output	75%
3	Steady Output	50%
4	Steady Output	25%
5	Steady Output	10%
6	Windy Flame	Bright
7	Electrical Flicker	100% - 0%
8	Electrical Flicker – Subtle	100% - 75%
9	Electrical Flicker – Dim and Subtle	50% - 0%
10	Electrical Flicker – Very Subtle	100% - 35%
11	Electrical Surge – Minor	50% - 100%
12	Electrical Surge – Dim to 100%	20% - 100%
13	Electrical Surge – Very Dim to Full	10% - 100%
14	Electrical Surge – Very Subtle	80% - 100%
15	Electrical Flicker – Extended OFF	35% - 0%
16	Electrical Surge – Filament Flash Very dim to 100%	10% - 100%
17	Strobe – Slow	
18	Strobe – Medium	Bright
19	Strobe – Fast	Bright
20	Stroboscopic – Very Fast	Bright

Note: As we are continually striving to improve our products, the included modes listed above may be changed and updated at any time without notice and/or inclusion in this datasheet.


Other Program Suites

The Pro Flicker controller is also available in with other programmed effect suites including candle and flame, neon sign, and Halloween effects. Please visit our website for additional information.

Types of LEDs that cannot be used

There are some LEDs and spotlights that include their own regulation and/or filter circuitry inside them. These LEDs will not be able to work with these flicker controllers as the internal regulator circuitry will filter out the high frequency modulation of the flicker controller and prevent it from changing the brightness of the LED. Generally, if the LED or spotlight is relatively expensive, it most likely will have internal regulation circuitry.

Additional Products from Eastern Voltage Research

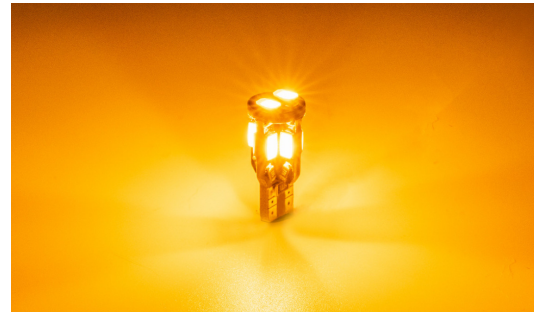

High Brightness Candle Flame LED

These high brightness Candle Flame LEDs were custom designed to provide the most realistic candle and flame color available. They were specifically designed for use with the Pro Line Flicker controllers. The LEDs were designed with a color temperature of 1900K to match that of a true candle flame.

- Color: Yellow-Orange (1900K)
- Brightness: 300 Lumens @ 12VDC
- Input Voltage: 7-12VDC
- Input Current: 175mA @ 12VDC
- Socket type: Compatible with 194 / 168 bulbs
- Wire can also be soldered directly to the bulb

Visit the website below for purchasing these candle flame LEDs as well as additional information.

www.EasternVoltageResearch.com

Custom Pattern Programming

Even though the number of operating modes in the Pro Flicker controller is quite impressive, customers sometimes do have a unique light pattern that they need for a specific application. We do offer custom pattern programming for the Pro Flicker controllers.